


Versions pre filtration mats G2 - G4

Product	Filter classes	Material thickness approx.	Surface weight approx.	Initial pressure drop*	Recommended final pressure drop	Air velocity	Average arrestance
		mm	g / m <sup>2</sup>	Pa	Pa	m / s	%
FL100	G2	5	100	20	250	1.5	65 - 80
FL150	G2	11	150	25	250	1.5	65 - 80
FL200	G3	22	200	35	250	1.5	80 - 90
FL220	G4	24	220	35	250	1.5	≥ 90
V15/350	G4	19	280	50	250	1.5	≥ 90
V15/400	G4	20	350	60	250	1.5	≥ 90
EA30	G4	30	350	60	250	1.5	≥ 90
EA40	G4	40	400	60	250	1.5	≥ 90
EA50	G4	50	450	65	250	1.5	≥ 90

\*flat sheet tested

Graph pre filtration mats FL 220 G4

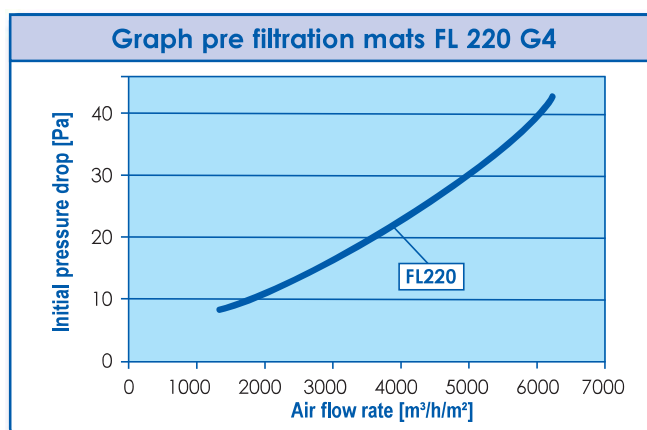

VOLZ Luftfilter GmbH & Co. KG

Robert-Bosch-Straße 25  
D-72160 Horb am Neckar

Phone: +49 7451 5516-0  
Fax: +49 7451 5516-120

info@volzfilters.com  
www.volzfilters.com

All information, images and pictures are property of VOLZ Luftfilter GmbH & Co. KG and are provided to the best knowledge. However VOLZ Luftfilter GmbH & Co. KG does not guarantee the completeness or correctness and cannot be held responsible for damages caused by the recipient's usage or his confidence in the completeness or correctness of the information. The stated data contains average values with tolerances as a result of production irregularities; therefore it does not relieve the recipient of own examination and tests. For the correctness of the information in particular cases, an explicit and written affirmation through VOLZ Luftfilter GmbH & Co. KG is required. Furthermore, the data serves as a service description and cannot be interpreted as warranted properties or durabilities.